


# APC

## Slim Type- 4.5°


# Double Power Chuck 筒夾式-超倍力夾頭

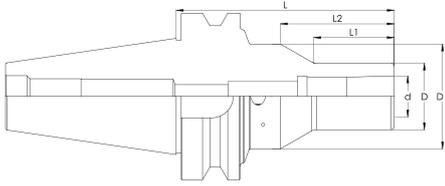

### APC Slim Type- 4.5° 本體

- ◆ 特別為5軸操作設計-4.5°的細長角度。搭配扭力六角扳手即可輕鬆完成刀具更換。
- ◆ Designed for 5-axis operations-slime line with 4.5 angle.  
Tool changes can be quickly and easily with a torque hex wrench.

Model NO.	Clamping Range(d)	D	D1	D2	L1	L2	L3	L	Weight(kg)
BT40-APC14-090S	3~14	24	-	50	30	-	48	90	1.4
-120S	3~14	24	30	50	38	61	78	120	1.6
-150S	3~14	24	30	50	38	78	96	150	1.9
APC20-090S	3~20	32	-	50	36	-	46	90	1.4
-120S	3~20	32	40	50	51	69	78	120	1.7
-150S	3~20	32	40	50	51	87	96	150	2.1
HSK63A-APC14-120S	3~14	24	-	50	35	-	53	120	1.5
-150S	3~14	24	30	50	38	61	78	150	1.8
-APC20-120S	3~20	32	-	50	41	-	51	120	1.6
-150S	3~20	32	40	50	51	69	78	150	1.9

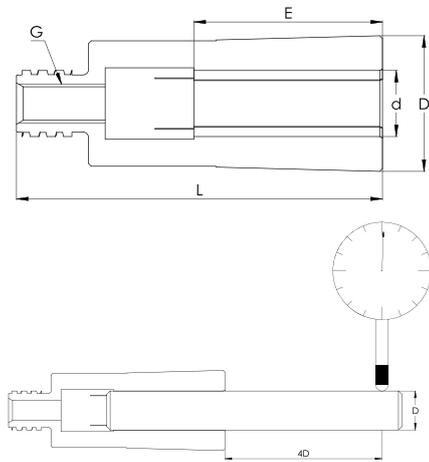

### APC Collet 筒夾

Model NO.	d	D	E	H	L	G	Weight(kg)
APC14-03	3	19	17	66	66	M7X1.0P	0.09
APC14-3.175	3.175		17				0.09
APC14-04	4		17				0.09
APC14-05	5		17				0.09
APC14-06	6		24				0.09
APC14-08	8		25	0.08			
APC14-10	10		30	0.07			
APC14-12	12		34	0.06			
APC14-14	14		34	0.04			
APC20-03	3		25	17			66
APC20-3.175	3.175	17		0.17			
APC20-04	4	17		0.17			
APC20-05	5	17		0.17			
APC20-06	6	24		0.17			
APC20-08	8	25		0.16			
APC20-10	10	30		0.15			
APC20-12	12	34		0.14			
APC20-14	14	34		0.12			
APC20-16	16	37		0.10			
APC20-18	18	39	0.08				
APC20-20	20	39	0.06				

筒夾等級  
Collet Grade

跳動精度 / Runout - Max  $\mu$   
4 倍直徑前 - 4 x D

A級  $\leq 10 \mu$   
AA級  $\leq 5 \mu$

### APC14 / APC 20 Torque Wrench 扭力扳手


Model NO: APC- 7Nm



P.S CL為刀具出水，訂購時，請更名為CL  
P.S When ordering the coolant type, please change the name. EX. APC20 - 6CL


# APC

# Double Power Chuck 筒夾式-超倍力夾頭

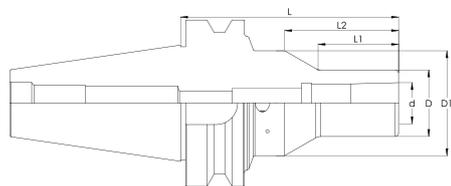

## APC 本體

Model NO.	Clamping Range(d)	D	D1	L1	L2	L	Weight(kg)
BT30-APC14-085	3~14	30	50	11	28	85	1.1
APC20-085	3~20	40	53	20	31	85	1.1
BT40-APC14-070	3~14	30	50	11	28	70	1.3
-120	3~14	30	50	59	78	120	1.6
APC20-070	3~20	40	63	18	38	70	1.4
-090	3~20	40	63	28	48	90	1.8
-120	3~20	40	63	46	68	120	2.2
BT50-APC20-130	3~20	40	63	46	68	130	4.8
HSK50A-APC14-100	3~14	30	50	11	28	100	1.2
APC20-100	3~20	40	53	20	31	100	1.2
HSK63A-APC14-095	3~14	30	50	11	28	95	1.4
-120	3~14	30	50	37	53	120	1.6
APC20-095	3~20	40	53	20	31	95	1.5
-120	3~20	40	53	43	56	120	1.7
HSK100A-APC20-100	3~20	40	63	18	38	100	3.4
150	3~20	40	63	46	68	150	4.2

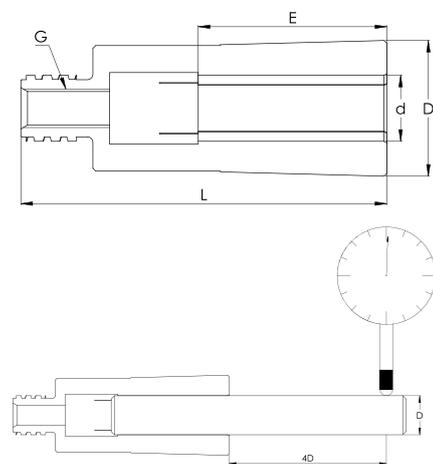

## APC Collet 筒夾

Model NO.	d	D	E	H	L	G	Weight(kg)
APC14-03	3	19	17	66	66	M7X1.0P	0.09
APC14-3.175	3.175		17				0.09
APC14-04	4		17				0.09
APC14-05	5		17	0.09			
APC14-06	6		24	50			0.09
APC14-08	8		25				0.08
APC14-10	10	30	25	50	0.07		
APC14-12	12	34			0.06		
APC14-14	14	34			0.04		
APC20-03	3	17			66	66	M7X1.0P
APC20-3.175	3.175	17	0.17				
APC20-04	4	17	0.17				
APC20-05	5	17	0.17				
APC20-06	6	24	0.17				
APC20-08	8	25	50	0.16			
APC20-10	10	30		0.15			
APC20-12	12	34		0.14			
APC20-14	14	34		0.12			
APC20-16	16	37	39	0.10			
APC20-18	18	39		0.08			
APC20-20	20	39		0.06			

筒夾等級  
Collet Grade

跳動精度 / Runout - Max  $\mu$   
4 倍直徑前 - 4 x D

A級

$\leq 10 \mu$

AA級

$\leq 5 \mu$

## APC14 / APC 20 Torque Wrench 扭力扳手

Model NO: APC- 7Nm



P.S CL為刀具出水·訂購時·請更名為CL

P.S When ordering the coolant type, please change the name. EX. APC20 - 6CL



ANN WAY

Holding Your Future