


Stop Screw

止付螺絲

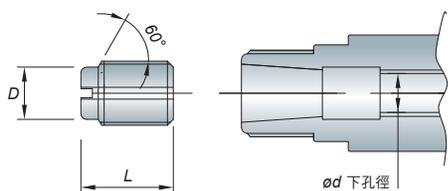

Model No.	Suit for	D	L	d (下孔徑)
M6xP1.0x10	ER08	6	10	5.1
M8xP1.0x15	ER11 / ASK06 / AVC06	6	15	7.1
M11xP1.0x16	ER16 / ASK10 / AVC10	9	16	10.2
M14xP1.0x20	ER20 / AVC12	11	20	13.1
M18xP1.5x22	ER25 / ASK16	14	22	16.6
M22xP1.5x24	ASK20	19	24	20.6
M24xP1.5x25	ER32	20	25	22.6
M28xP1.5x25	ER40 / ASK25	25	25	26.6
M16xP2.0x23	ASK13	23	23	14

Unit: mm

Torque wrench

扭力扳手



Model No.	Nm	in-lb	Magnetic Bit Holder 磁性扳手本體	Torque Adaptor 扭力轉接頭	Star Bits 星型扳手頭
TX6-0.6Nm	0.6	5.3	HW410484DG	HW-DG/0.6	SB-T6
TX7-0.9Nm	0.9	8.0	HW410484DG	HW-DG/0.9	SB-T7
TX8-1.2Nm	1.2	10.6	HW410484DG	HW-DG/1.2	SB-T8
TX9-1.5Nm	1.5	13.2	HW410484DG	HW-DG/1.5	SB-T9
TX10-2.0Nm	2.0	17.7	HW410484DG	HW-DG/2.0	SB-T10
TX15-3.0Nm	3.0	26.6	HW410484DG	HW-DG/3.0	SB-T15
TX20-5.0Nm	5.0	44.25	HW410484DG	HW-DG/5.0	SB-T20

Spindle Force Dynamometer

主軸拉力計 - 油壓式

- Hydraulic mechanical structure, high stability
- When ordering, please specify the degree of pull sudd
- Force: 1 kg/cm² = 10kg = 100 N
- Using the German WIKA oil pressure gauge
- 油壓機械式結構，高穩定性
- 訂購時請確認拉頭度數
- 拉力計壓力設計：1 kg/cm² = 10kg = 100 N
- 使用德國 WIKA 油壓表



Model No.	Range
BT30 CFG	0~150kg/cm ²
BT40 CFG	0~150kg/cm ²
BT50 CFG	0~350kg/cm ²