




型號 Model No.	A			B	C	適用螺絲 Screw	夾持力 Clamping Force (KN)	表面硬度 Surface Hardness (HRC)	Weight (kg)
	最小 Min	最適宜 Optimum	最大 Min						
M062525	23	25	26	25	12	M6x16	18	48-52	0.04
M083030	27	30	31	30	15	M8x20	25	48-52	0.08
M104040	36	40	42	40	20	M10x25	45	48-52	0.20
M124540	40	45	47	40	22	M12x30	65	48-52	0.35
M166060	54	60	63	60	29	M16x40	110	48-52	0.65





Unit: mm

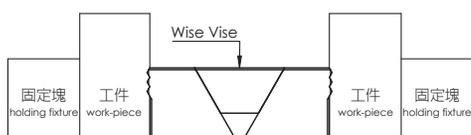


TYPE-A




TYPE-B

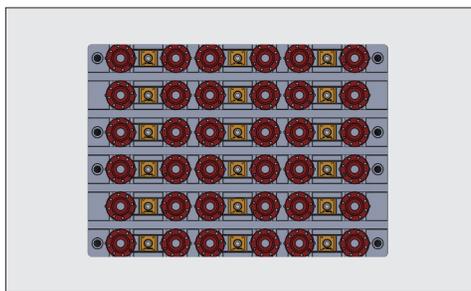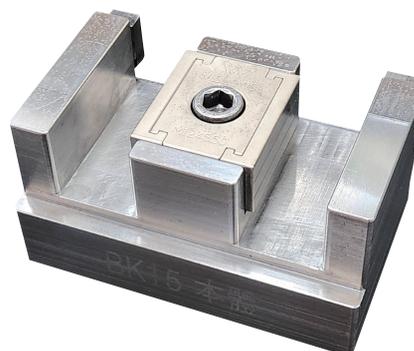


圓形油壓缸蓋加工超量產治具範例  
An example of fixing round work-piece

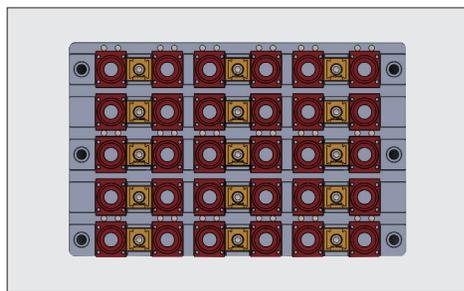

油壓缸蓋超量產治具範例  
An example of fixing square work-piece

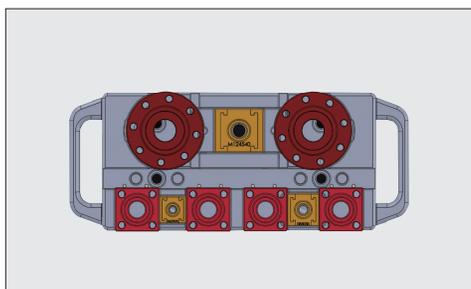

快速換模加工治具範例  
Zero point clamping system is available.  
High-precision exchange of clamping devices, fixtures and work-pieces within seconds.

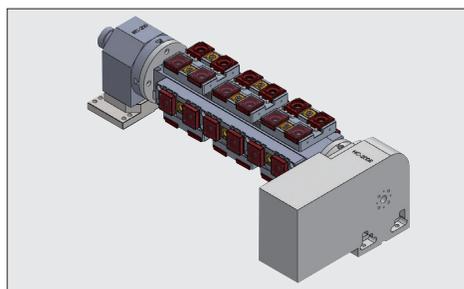

第四軸應用範例  
An application example:  
The 4<sup>th</sup> axis + Fixture