


BORING BARS 內徑車刀





MCLN

S.-MCLNR/L-12 鋼柄 Steel shank

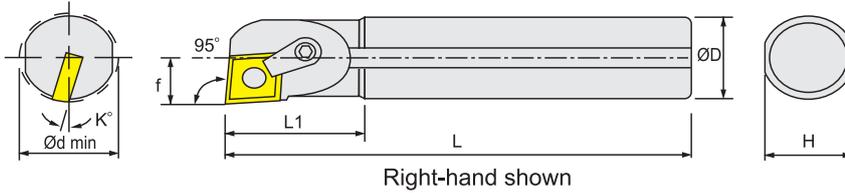

A.-MCLNR/L-12 鋼柄+中心水孔 Steel shank+coolant hole

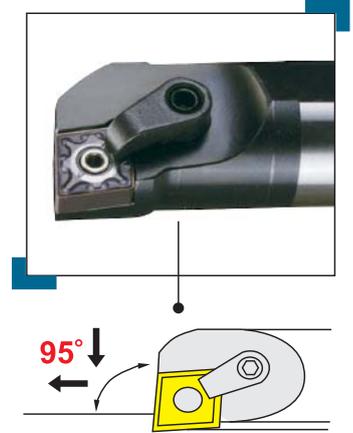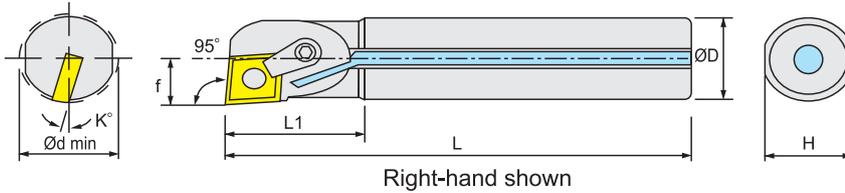


(Unit: mm)

Model No.	Dimensions							Insert	Shim	Pin	Wrench	Clamp	Screw	Wrench
	D	L	L1	f	H	K	dmin							
S20R-MCLNR/L-12	20	200	36	13	18	15	25	CN..1204..	--	MLP44-A	PL25	MC620	MS620	PL30
S25R-MCLNR/L-12	25	200	40	15.5	23	13	30		--	MLP44-A	PL25	MC620	MS620	PL30
S32S-MCLNR/L-12	32	250	48	19.5	30	13	40		CMS432	MLP46-A	PL25	MC620	MS625	PL30
S40T-MCLNR/L-12	40	300	55	25.5	37	12	50		--	MLP44-A	PL25	MC620	MS620	PL30
S50U-MCLNR/L-12	50	350	60	30.5	47	10	60		CMS432	MLP46-A	PL25	MC620	MS625	PL30
S60V-MCLNR/L-12	60	400	60	35.5	57	9	70	--	MLP44-A	PL25	MC620	MS620	PL30	
A20R-MCLNR/L-12	20	200	36	13	18	15	25	CN..1204..	--	MLP44-A	PL25	MC620	MS620	PL30
A25R-MCLNR/L-12	25	200	40	15.5	23	13	30		--	MLP44-A	PL25	MC620	MS620	PL30
A32S-MCLNR/L-12	32	250	48	19.5	30	13	40		CMS432	MLP46-A	PL25	MC620	MS625	PL30
A40T-MCLNR/L-12	40	300	55	25.5	37	12	50		--	MLP44-A	PL25	MC620	MS620	PL30



* ISO inserts recommended.

MDUN

S.-MDUNR/L-15 鋼柄 Steel shank

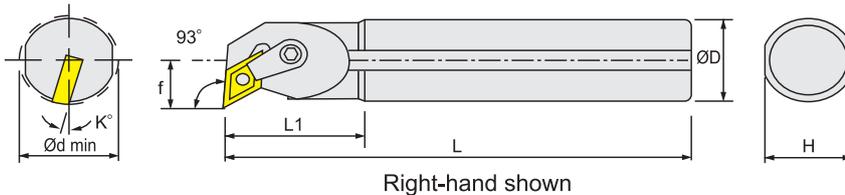

A.-MDUNR/L-15 鋼柄+中心水孔 Steel shank+coolant hole

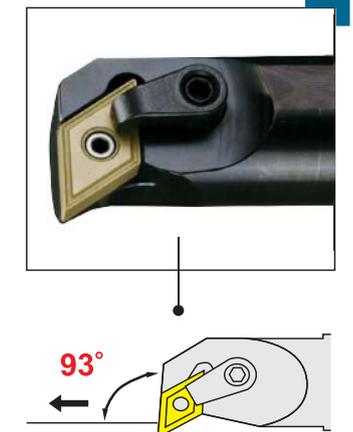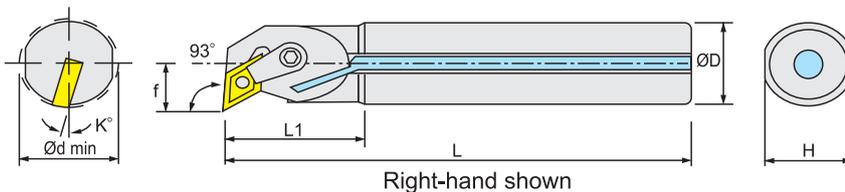

(Unit: mm)

Model No.	Dimensions							Insert	Shim	Pin	Wrench	Clamp	Screw	Wrench
	D	L	L1	f	H	K	dmin							
S25R-MDUNR/L-15	25	200	45	17	23	13	32	DN..1504..	--	MLP44-A	PL25	MC620	MS620	PL30
S32S-MDUNR/L-15	32	250	50	21	30	13	40		DMS432	MLP46-A	PL25	MC620	MS625	PL30
A25R-MDUNR/L-15	25	200	45	17	23	13	32	DN..1504..	--	MLP44-A	PL25	MC620	MS620	PL30
A32S-MDUNR/L-15	30	250	50	21	30	13	40		DMS432	MLP46-A	PL25	MC620	MS625	PL30

* ISO inserts recommended.