


# BORING BARS 內徑車刀




## SCLP



### S.-SCLPR/L-.. 鋼柄 Steel shank

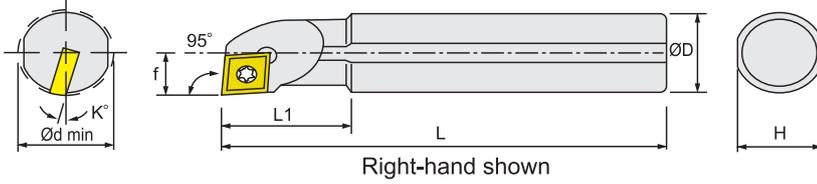

### A.-SCLPR/L-.. 鋼柄+中心水孔 Steel shank+coolant hole

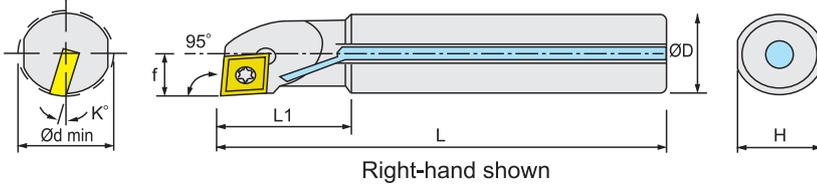

### C.-SCLPR/L-.. 鎢鋼柄 Carbide shank

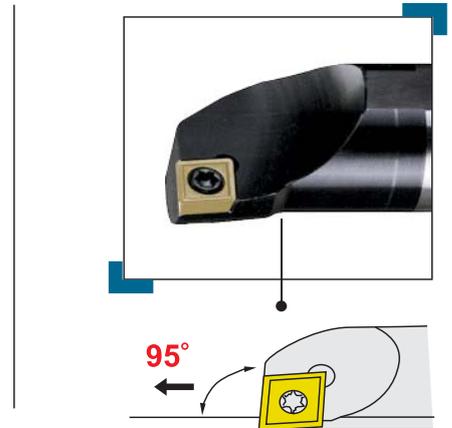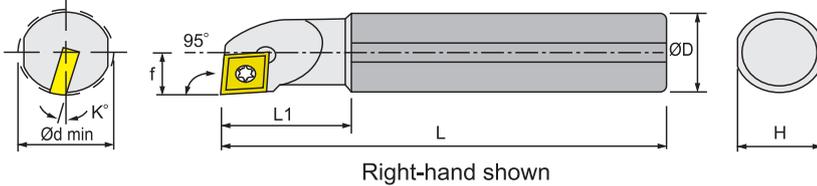

(Unit: mm)

Model No.	Dimensions							Insert	Screw	Wrench
	D	L	L1	f	H	K	dmin			
S08K-SCLPR/L-06	8	125	20	5	7	10	10	CP..0602..	MS2506A	ETF9
S10K-SCLPR/L-06	10	125	22	6	9	8	12			
S12M-SCLPR/L-06	12	150	26	8	11	7	16			
S10K-SCLPR/L-08	10	125	22	6	9	8	12	CP..0802..	MS3006A	ETF9
S12M-SCLPR/L-08	12	150	26	8	11	7	16			
S12M-SCLPR/L-08-D13	12	150	26	6.5	11	7	13			
S12M-SCLPR/L-09	12	150	26	8	11	7	16	CP..0903..	MS4008A	ETF15
S16Q-SCLPR/L-09	16	180	32	10	15	7	20			
S16Q-SCLPR/L-09-D18	16	180	32	9	15	7	18			
S20R-SCLPR/L-09	20	200	36	13	18	4	25			
S25R-SCLPR/L-09	25	200	40	15	23	0	30			
S25R-SCLPR/L-09	25	200	40	15	23	0	30			
A08K-SCLPR/L-06	8	125	20	5	7	10	10	CP..0602..	MS2506A	ETF9
A10K-SCLPR/L-06	10	125	22	6	9	8	12			
A10K-SCLPR/L-08	10	125	22	6	9	8	12			
A12M-SCLPR/L-08	12	150	26	8	11	7	16	CP..0802..	MS3006A	ETF9
A12M-SCLPR/L-09	12	150	26	8	11	7	16			
A12M-SCLPR/L-09	12	150	26	8	11	7	16			
A16Q-SCLPR/L-09	16	180	32	10	15	7	20	CP..0903..	MS4008A	ETF15
A16Q-SCLPR/L-09-D18	16	180	32	10	15	7	18			
A20R-SCLPR/L-09	20	200	40	13	18	4	25			
A25R-SCLPR/L-09	25	200	40	15	23	0	30			
A25R-SCLPR/L-09	25	200	40	15	23	0	30			
A25R-SCLPR/L-09	25	200	40	15	23	0	30			
C10K-SCLPR-08	10	125	22	6	9.2	8	12	CP..0822..	MS3006A	ETF9
C12M-SCLPR-08	12	150	26	8	11.2	7	16		MS3008A	
C12M-SCLPR-09	12	150	26	8	11.2	7	16	CP..0903..	MS4008A	ETF15
C16R-SCLPR-09	16	200	32	10	15.2	7	20			
C16R-SCLPR-09-D18	16	200	32	10	15.2	7	18			

\* ISO inserts recommended.