


BORING BARS 內徑車刀





SDJC

■ S.-SDJCR/L-.. 鋼柄 Steel shank

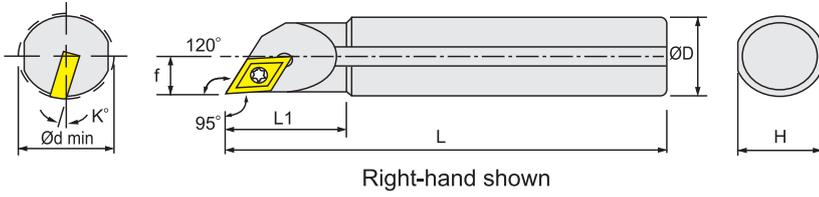

■ A.-SDJCR/L-.. 鋼柄+中心水孔 Steel shank+coolant hole

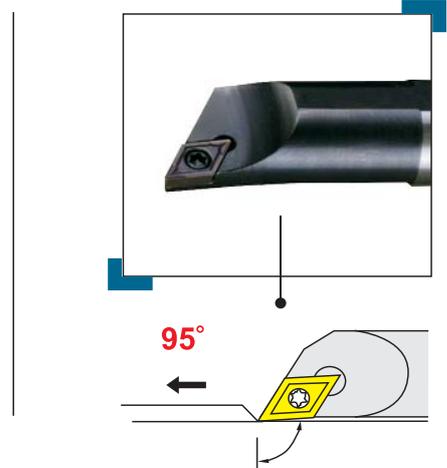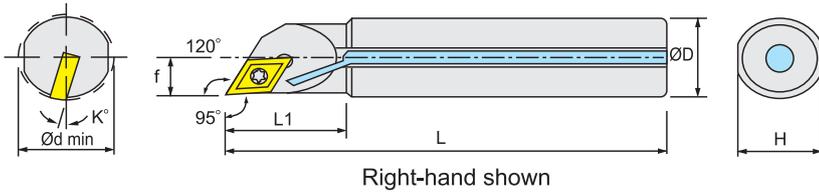

(Unit: mm)

Model No.	Dimensions							Insert	Screw	Wrench
	D	L	L1	f	H	K	dmin			
S08K-SDJCR/L-07	8	125	22	5	7	15	10	DC..0702..	MS2506A	ETF9
S10K-SDJCR/L-07	10	125	25	6	9	13	12			
S12M-SDJCR/L-07	12	150	30	7	11	10	14			
S16Q-SDJCR/L-07	16	180	38	9.5	15	7	19			
S16Q-SDJCR/L-11	16	180	38	9.5	15	7	19	DC..11T3..	MS4009A	ETF15
S20R-SDJCR/L-11	20	200	42	11.5	18	7	23			
S25R-SDJCR/L-11	25	200	45	14	23	5	28	DC..11T3..	MS4009A	ETF15
S32S-SDJCR/L-11	32	250	48	17.5	30	5	35			
A08K-SDJCR/L-07	8	125	22	5	7	15	10			
A10K-SDJCR/L-07	10	125	25	6	9	13	12	DC..0702..	MS2506A	ETF9
A12M-SDJCR/L-07	12	150	30	7	11	10	14			
A16Q-SDJCR/L-07	16	180	38	9.5	15	7	19			
A16Q-SDJCR/L-11	16	180	38	9.5	15	7	19			
A20R-SDJCR/L-11	20	200	42	11.5	18	7	23	DC..11T3..	MS4009A	ETF15
A25R-SDJCR/L-11	25	200	45	14	23	5	28			

* ISO inserts recommended.