


BORING BARS 內徑車刀




SDQC



■ S..SDQCR/L.. 鋼柄 Steel shank

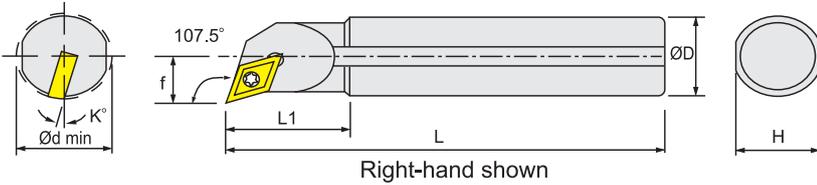


■ A..SDQCR/L.. 鋼柄+中心水孔 Steel shank+coolant hole

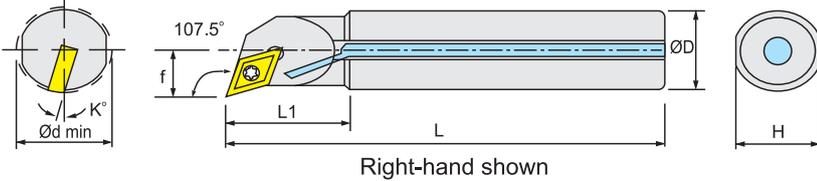

■ C..SDQCR/L.. 鎢鋼柄 Carbide shank

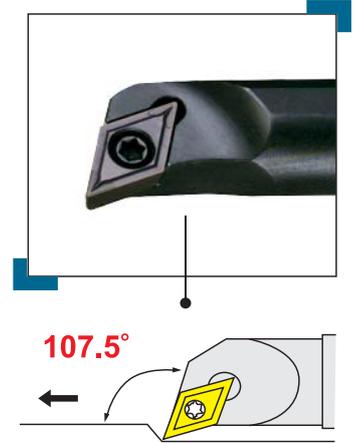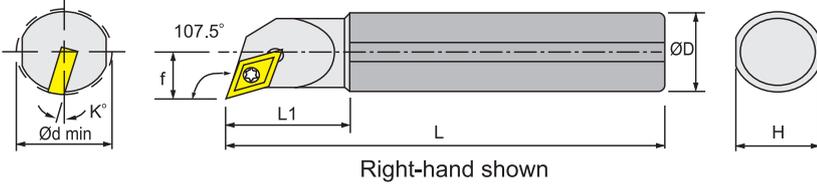

(Unit: mm)

Model No.	Dimensions							Insert	Screw 	Wrench 
	D	L	L1	f	H	K	dmin			
S10K-SDQCR/L-07	10	125	22	6.5	9	13	13	DC..0702..	MS2506A	ETF9
S12M-SDQCR/L-07	12	150	30	8	11	10	16			
S16Q-SDQCR/L-07	16	180	35	10.25	15	7	20			
S20R-SDQCR/L-07	20	200	40	12.5	18	7	25	DC..11T3..	MS4009A	ETF15
S16Q-SDQCR/L-11	16	180	35	10.5	15	7	20			
S20R-SDQCR/L-11	20	200	40	13	18	7	25			
S25R-SDQCR/L-11	25	200	45	15.5	23	5	32			
S32S-SDQCR/L-11	32	250	48	19.5	30	5	40			
S40T-SDQCR/L-11	40	300	55	25	37	3	50	DC..11T3..	MS4009A	ETF15
S50U-SDQCR/L-11	50	350	60	30	47	2	60			
A10K-SDQCR/L-07	10	125	22	6.5	9	13	13			
A12M-SDQCR/L-07	12	150	30	8	11	10	16	DC..0702..	MS2506A	ETF9
A16Q-SDQCR/L-07	16	180	35	10.25	15	7	20			
A16Q-SDQCR/L-11	16	180	35	10.5	15	7	20			
A20R-SDQCR/L-11	20	200	40	13	18	7	25	DC..11T3..	MS4009A	ETF15
A25R-SDQCR/L-11	25	200	45	15.5	23	5	32			
A32S-SDQCR/L-11	32	250	48	19.5	30	5	40			
A40T-SDQCR/L-11	40	300	55	25	37	3	50			
A50U-SDQCR/L-11	50	350	60	30	47	2	60			
C10M-SDQCR-07	10	150	22	6	9.2	13	13	DC..0702..	MS2506A	ETF9
C12Q-SDQCR-07	12	180	30	8	11.2	10	16			
C16R-SDQCR/L-07	16	200	35	10.25	15.2	7	20			

* ISO inserts recommended.