



SDUC



S..SDUCR/L.. 鋼柄 Steel shank

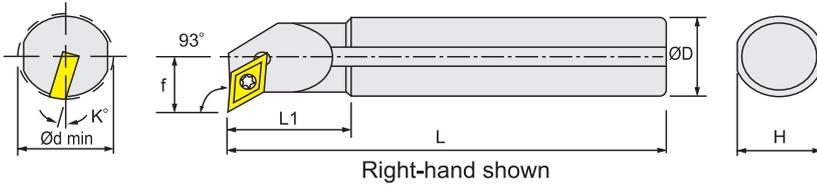

A..SDUCR/L.. 鋼柄+中心水孔 Steel shank+coolant hole

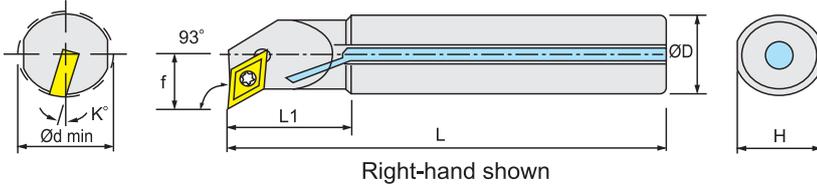

C..SDUCR/L.. 鎢鋼柄 Carbide shank

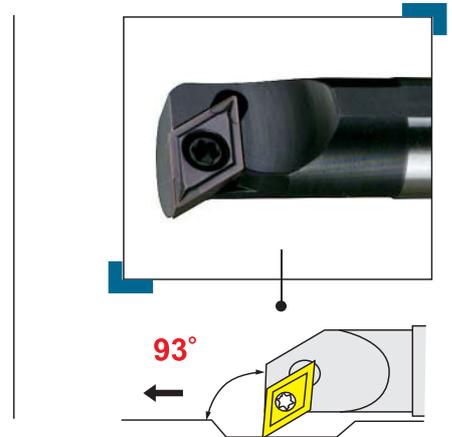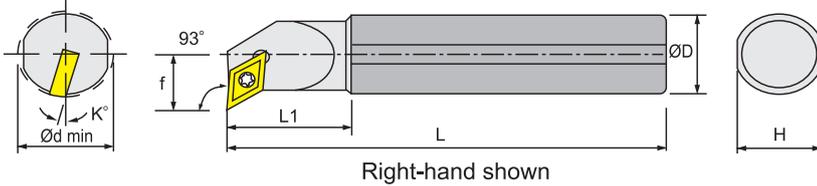

(Unit: mm)

Model No.	Dimensions							Insert	Screw	Wrench
	D	L	L1	f	H	K	dmin			
S10K-SDUCR/L-07	10	125	25	7	9	13	13	DC..0702..	MS2506A	ETF9
S12M-SDUCR/L-07	12	150	30	8.5	11	10	16			
S16Q-SDUCR/L-07	16	180	30	11	15	7	20			
S20R-SDUCR/L-07	20	200	40	12.5	18	7	25			
S16Q-SDUCR/L-11	16	180	30	11	15	7	20	DC..11T3..	MS4009A	ETF15
S20R-SDUCR/L-11	20	200	40	13	18	7	25			
S25R-SDUCR/L-11	25	200	45	16	23	5	32			
S32S-SDUCR/L-11	32	250	48	20	30	5	40			
S40T-SDUCR/L-11	40	300	55	26	37	3	50			
A10K-SDUCR/L-07	10	125	25	7	9	13	13	DC..0702..	MS2506A	ETF9
A12M-SDUCR/L-07	12	150	30	8.5	11	10	16			
A16Q-SDUCR/L-07	16	180	30	11	15	7	20			
A16Q-SDUCR/L-11	16	180	30	11	15	7	20			
A20R-SDUCR/L-11	20	200	40	13	18	7	25	DC..11T3..	MS4009A	ETF15
A25R-SDUCR/L-11	25	200	45	16	23	5	32			
A32S-SDUCR/L-11	32	250	48	20	30	5	40			
A40T-SDUCR/L-11	40	300	55	26	37	3	50			
C10M-SDUCR-07	10	150	25	7	9.2	13	13			
C12Q-SDUCR-07	12	180	30	8.5	11.2	10	16			
C16R-SDUCR-11	16	200	30	11	15.2	7	20	DC..11T3..	MS4009A	ETF15

* ISO inserts recommended.