



STUB/C



■ S.-STUB/CR/L-.. 鋼柄 Steel shank

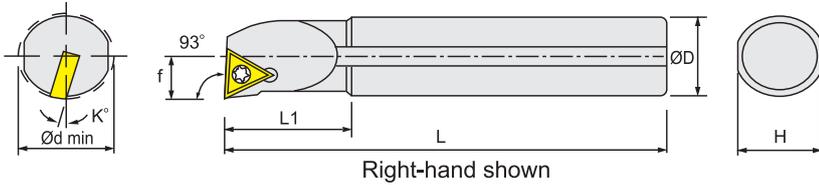

■ A.-STUB/CR/L-... 鋼柄+中心水孔 Steel shank+coolant hole

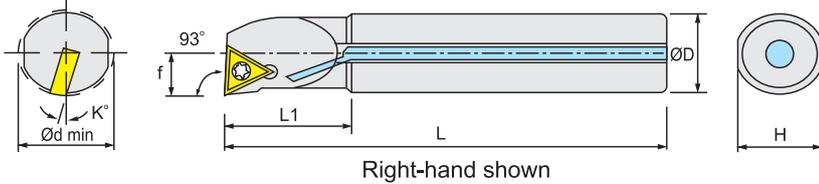

■ C.-STUB/CR/L-.. 鎢鋼柄 Carbide shank

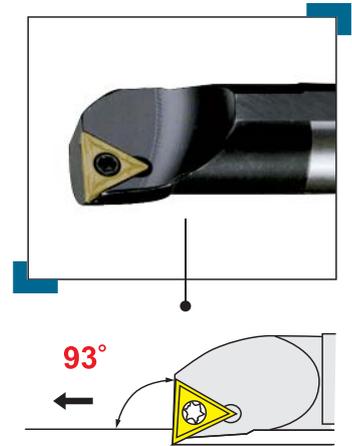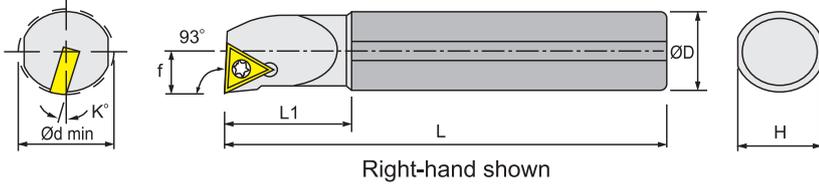

(Unit: mm)

Model No.	Dimensions							Insert	Screw	Wrench
	D	L	L1	f	H	K	dmin			
S06H-STUBR/L-06	6	100	15	3.5	5	15	7	TB..0601..	MS2004A	ETF6
S08K-STUBR/L-06-D9	8	125	20	4.5	7	15	9	TC..0902..	MS2205A	ETF7
S08K-STUCR/L-09	8	125	20	5.5	7	15	10		MS2206A	
S10K-STUCR/L-09	10	125	22	6	9	13	12	TC..1102..	MS2506A	ETF9
S10K-STUCR/L-09-D11	10	125	22	5.5	9	13	11			
S12M-STUCR-09	12	150	26	8	11	10	16	TC..16T3..	MS4011A	ETF15
S14M-STUCR-09	14	150	26	8	13	10	16			
S10K-STUCR/L-11	10	125	22	6	9	13	12	TC..0902..	MS2205A	ETF7
S12M-STUCR/L-11	12	150	26	8	11	10	16			
S12M-STUCR/L-11-D13	12	150	26	6.5	11	10	13	TC..1102..	MS2506A	ETF9
S16Q-STUCR/L-11	16	180	32	10	15	7	20			
S16Q-STUCR/L-11-D18	16	180	32	9	15	7	18	TC..16T3..	MS4011A	ETF15
S20R-STUCR/L-16	20	200	40	13	18	7	25			
S25R-STUCR/L-16	25	200	40	15	23	5	30	TC..0902..	MS2205A	ETF7
S32S-STUCR/L-16	32	250	48	20	30	5	38			
S32T-STUCR/L-16	32	300	48	20	30	5	38	TC..1102..	MS2506A	ETF9
A08K-STUCR/L-09	8	125	20	5.5	7	15	10			
A10K-STUCR/L-09	10	125	22	6	9	13	12	TC..16T3..	MS4011A	ETF15
A10K-STUCR/L-11	10	125	22	6	9	13	12			
A12M-STUCR/L-11	12	150	26	8	11	10	16	TC..0902..	MS2205A	ETF7
A16Q-STUCR/L-11	16	180	32	10	15	7	20			
A20R-STUCR/L-16	20	200	40	13	18	7	25	TC..1102..	MS2506A	ETF9
A25R-STUCR/L-16	25	200	40	15	23	5	30			
A32S-STUCR/L-16	32	250	48	20	30	5	38	TC..0902..	MS2205A	ETF7
A32T-STUCR/L-16	32	300	48	20	30	5	38			
C06J-STUBR-06	6	110	15	3.5	5.7	15	7	TC..1102..	MS2506A	ETF9
C08K-STUBR/L-06-D09	8	125	20	4.5	7.2	15	9			
C08K-STUCR/L-09	8	125	20	5.5	7.2	15	10	TC..0902..	MS2205A	ETF7
C10K-STUCR-09	10	125	22	6	9.2	13	12			
C10K-STUCR-11	10	125	22	6	9.2	13	12	TC..1102..	MS2506A	ETF9
C12M-STUCR/L-11	12	150	26	8	11.2	10	16			
C16R-STUCR-11	16	200	32	10	15.2	7	20	TC..1102..	MS2506A	ETF9
C16R-STUCR-11-D18	16	200	32	9	15.2	7	18			

* ISO inserts recommended.