


BORING BARS 內徑車刀





SWUB


■ S...-SWUBR/L-.. 鋼柄 Steel shank

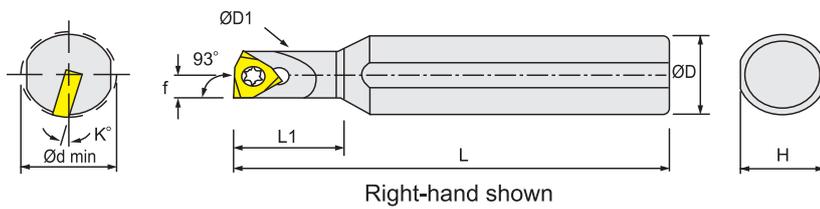

■ A...-SWUBR/L-.. 鋼柄+中心水孔 Steel shank+coolant hole

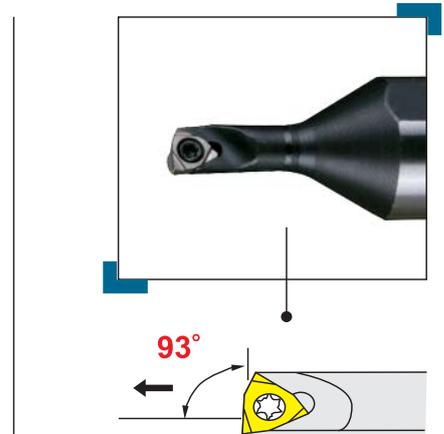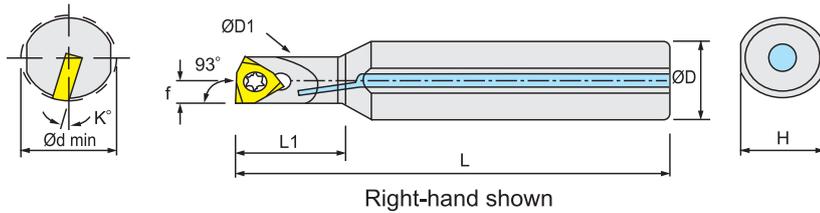

(Unit: mm)

Model No.	Dimensions								Insert	Screw 	Wrench 
	D	D1	L	L1	f	H	K	dmin			
S1005K-SWUBR/L-06-L15	10	5	125	15	3.0	9	12	6	WB..0601..	MS2003A	ETF6
S1205K-SWUBR/L-06-L15	12	5	125	15	3.0	11	12	6			
S1605K-SWUBR/L-06-L15	16	5	125	15	3.0	15	12	6			
S1006K-SWUBR/L-06-L18	10	6	125	18	3.5	9	12	7			
S1007K-SWUBR/L-06-L20	10	7	125	20	4.0	9	12	8	WB..0601..	MS2004A	ETF6
A1005K-SWUBR/L-06-L15	10	5	125	15	3.0	9	12	6			
A1205K-SWUBR/L-06-L15	12	5	125	15	3.0	11	12	6			
A1605K-SWUBR/L-06-L15	16	5	125	15	3.0	15	12	6			
A1006K-SWUBR/L-06-L18	10	6	125	18	3.5	9	12	7			
A1007K-SWUBR/L-06-L20	10	7	125	20	4.0	9	12	8			
										MS2004A	

* ISO inserts recommended.