


BT / NT
series

ART

Rigid Tap Holder

剛性攻牙本體

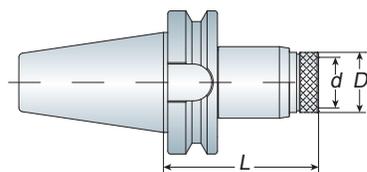

- ART tap holder is without floating.
- Tap collet is easy and quick to change
- Torque control type and positive drive type tap collets can be used for ART tap holder.
- ART 剛性攻牙本體不具伸縮功能
- 絲攻筒夾易更換
- 扭力絲攻筒夾及剛性絲攻筒夾皆適用


| Model No. | d | D | L | Tapping Range | Collet Type | Weight (kg) |
|-------------|----|----|----|---------------|-------------|-------------|
| BT30 ART312 | 19 | 36 | 60 | M3~M12 | ATC312 | 0.60 |
| BT40 ART312 | 19 | 36 | 65 | M3~M12 | ATC312 | 1.20 |
| BT50 ART312 | 19 | 36 | 80 | M3~M12 | ATC312 | 4.00 |
| BT40 ART822 | 31 | 53 | 85 | M8~M22 | ATC822 | 1.60 |
| BT50 ART822 | 31 | 53 | 95 | M8~M22 | ATC822 | 4.40 |

Unit: mm

ATP

Tension & Compression Tap Holder

伸縮攻牙本體



- ATP tap holder is with tension and compression, so it can extend the tap lifetime.
- Torque control type and positive drive type tap collets can be used for ATP tool holder.
- ATP 伸縮攻牙本體具有伸縮功能，能延長絲攻使用壽命
- 扭力絲攻筒夾及剛性絲攻筒夾皆適用


| Model No. | d | D | L | L1 | L2 | Tapping Range | Collet Type | Weight (kg) |
|-----------------|----|----|-----|------|------|---------------|-------------|-------------|
| BT30 ATP312 | 19 | 36 | 70 | 6~10 | 6~10 | M3~M12 | ATC312 | 0.70 |
| BT40 ATP312 | 19 | 36 | 75 | 6~10 | 6~10 | M3~M12 | ATC312 | 1.20 |
| BT40 ATP312-135 | 19 | 36 | 135 | 6~10 | 6~10 | M3~M12 | ATC312 | 1.80 |
| BT50 ATP312 | 19 | 36 | 85 | 6~10 | 6~10 | M3~M12 | ATC312 | 4.00 |
| BT50 ATP312-120 | 19 | 36 | 120 | 6~10 | 6~10 | M3~M12 | ATC312 | 4.20 |
| BT50 ATP312-150 | 19 | 36 | 150 | 6~10 | 6~10 | M3~M12 | ATC312 | 4.50 |
| BT40 ATP822 | 31 | 53 | 110 | 6~10 | 6~10 | M8~M22 | ATC822 | 1.90 |
| BT50 ATP822 | 31 | 53 | 105 | 6~10 | 6~10 | M8~M22 | ATC822 | 4.70 |

Unit: mm



Straight Shank

直柄伸縮攻牙本體



- ATP tap holder is with tension and compression, so it could extend the tap lifetime.
- Torque control type and positive drive type tap collets can be used for ATP tool holder.
- ATP 伸縮攻牙本體具有伸縮功能，能延長絲攻使用壽命
- 扭力絲攻筒夾及剛性絲攻筒夾皆適用

| Model No. | C | d | D | L | L1 | L2 | L3 | Tapping Range | Collet Type | Weight (kg) |
|------------|----|----|----|-----|------|------|----|---------------|-------------|-------------|
| C20 ATP312 | 20 | 19 | 36 | 155 | 6~10 | 6~10 | 65 | M3~M12 | ATC312 | 0.90 |
| C25 ATP312 | 25 | 19 | 36 | 155 | 6~10 | 6~10 | 65 | M3~M12 | ATC312 | 1.00 |
| C25 ATP822 | 25 | 31 | 53 | 185 | 6~10 | 6~10 | 70 | M8~M22 | ATC822 | 1.70 |
| C32 ATP822 | 32 | 31 | 53 | 185 | 6~10 | 6~10 | 70 | M8~M22 | ATC822 | 1.90 |

Unit: mm



P62/63-ATC Collet