

Morse Taper Holder

莫氏錐度刀桿 - A 型

MTA

SK
series
DIN 69871A

Model No.	MT. No.	D	L	Capacity			Weight (kg)
				Drill	Reamer	End Mill	
SK30 MTA1-050	MTA1	25	50	2~14	5~14	10~14	0.50
	MTA2-065	32	65	14~23	14.5~23	16~22	0.70
	MTA3-080	40	80	23~32	24~32	24~32	0.80
SK40 MTA1-050	MTA1	25	50	2~14	5~14	10~14	1.00
	MTA2-050	32	50	14~23	14.5~23	16~22	1.00
	MTA3-070	40	70	23~32	24~32	24~32	1.10
	MTA4-095	50	95	32~50	32~50	35~50	1.50
SK50 MTA1-045	MTA1	25	45	2~14	5~14	10~14	2.80
	MTA2-060	32	60	14~23	14.5~23	16~22	3.00
	MTA3-065	40	65	23~32	24~32	24~32	3.00
	MTA4-095	50	95	32~50	32~50	35~50	3.40
	MTA5-120	65	120	50~75	50	40~75	3.50

Unit: mm



- The tool holder for morse taper shank with internal tang.

Morse Taper Holder

莫氏錐度刀桿 - B 型

MTB

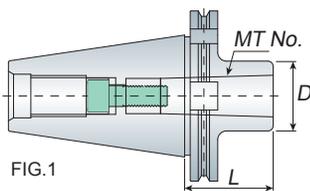


FIG.1

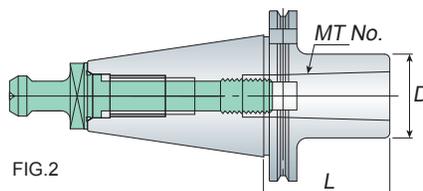


FIG.2

Model No.	FIG.	MT. No.	D	L	Capacity			Weight (kg)
					Drill	Reamer	End Mill	
SK40 MTB1-050	1	MTB1	25	50	2~14	5~14	10~14	1.00
	1	MTB2	32	50	14~23	14.5~23	16~22	1.10
	1	MTB3	40	70	23~32	24~32	24~32	1.20
	2	MTB4	50	90	32~50	32~50	35~50	1.40
SK50 MTB1-045	1	MTB1	25	45	2~14	5~14	10~14	2.90
	1	MTB2	32	60	14~23	14.5~23	16~22	3.00
	1	MTB3	40	65	23~32	24~32	24~32	3.10
	1	MTB4	50	95	32~50	32~50	35~50	3.50
	2	MTB5	65	105	50~75	50	40~75	4.10


Unit: mm



- The tool holder for morse taper shank with internal draw bolt thread.
- MTB-FIG.2 type should be fitted for extension pull stud.
- MTB-FIG.2 刀桿需配合 MTB 長拉頭使用

Extension Pull Stud

長拉頭

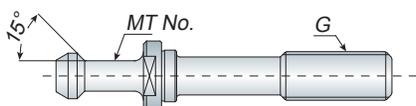

Model No.	MT. No.	G	Weight (kg)
MTB4-DIN69872A (M16)	MTB4	M16x2.0P	0.20
MTB5-DIN69872A (M20)	MTB5	M20x2.5P	0.50

Unit: mm



- The extension pull stud must be ordered separately.
- MTB 長拉頭為另購品